


# FDC11-16 - Flow divider/combiner

Pressure compensated, spool type  
Up to 140 L/min (37 USgpm) • 350 bar (5000 psi)

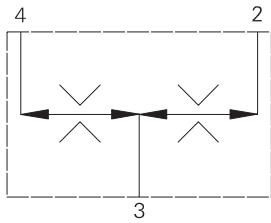

## Operation


Inlet flow passes through the two matched orifices in the spools, through the spools and out of the radial holes in the sleeve. The matched orifices and the compensating springs ensure that the flow is divided equally, excess flow in either direction causes the spool to

move and close the radial holes in the sleeve until equilibrium is restored. In the reverse direction the spools close together and regulate the flow in through the radial ports.

## Features

One valve synchronizes in both directions. Matched spools give high accuracy under load and pressure imbalance conditions. Cartridge construction gives versatility of application. A valve may be fitted into a line body, a custom designed Hydraulic Integrated Circuit or other hydraulic equipment.

## Sectional view

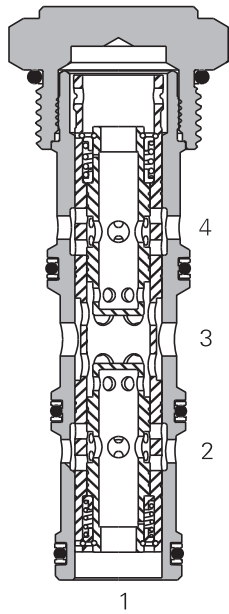

## Performance data

### Ratings and specifications

Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	350 bar (5000 psi)
Cartridge fatigue pressure (infinite life)	350 bar (5000 psi)
Rated inlet flow	See model code
Temperature range	-40° to 120° C (-40° to 248° F)
Cavity	C-16-4
Fluids	All general purpose hydraulic fluids such as MIL-H-5606, SAE 10, SAE 20, etc.
Filtration	Cleanliness code 18/16/13
Standard housing materials	Aluminum or steel
Weight cartridge only	0,35 kg (0.78 lbs)
Seal Kits	889634 (Buna-N) 889638 (Viton®)


Viton is a registered trademark of E.I. DuPont

## Description

This range of flow divider/combiner valves gives division of input flow into two equal parts and re-combination of flow in the reverse direction. Pressure compensation ensures that whether dividing or combining, equal flow is maintained over a wide range of pressure variation. A typical use of these valves is to divide a pump flow to operate two actuators (which may be under different load conditions and at different pressures) and to re-combine the return flows to synchronize actuator movement. Flow variation is within  $\pm 10\%$  with the maximum variation of pressure and inlet flow and under normal conditions will be significantly less.

## Pressure drop

Cartridge only

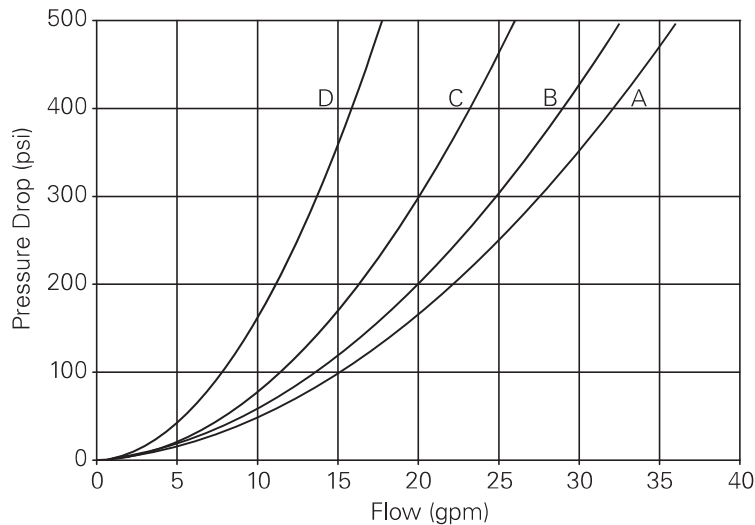

## Flow division

A - 66  
B - 44


C - 33  
D - 22

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

# FDC11-16 - Flow divider/combiner

Pressure compensated, spool type  
Up to 140 L/min (37 USgpm) • 350 bar (5000 psi)

## Model code

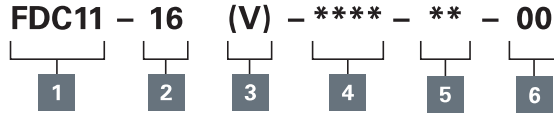

### 1 Function

FDC11 - Flow divider/combiner

### 2 Size

16 - 16 size

### 4 Port size

Code	Port size	Housing number	
		Aluminium	Steel
A12T	SAE 12	20785*	
A6B	3/4" BSPP	02-186592*	
A4G	1/2" BSPP	30706	
A6G	3/4" BSPP	30708	
A10H	SAE 10	30707	
A12H	SAE 12	30709	
S4G	1/2" BSPP		02-175143
S6G	3/4" BSPP		02-175144
S10T	SAE 10		02-175141
S12T	SAE 12		02-175142

See section J for housing details.

### 3 Seals

Blank - Buna-N  
V - Viton®

### 5 Flow divisions (Ratios)

Code	Flow division %		Rated inlet flow	
	Port 4	Port 2	L/min	(USgpm)
66	50	50	133,0	(35)
44	50	50	114,0	(30)
33	50	50	083,6	(22)
22	50	50	057,0	(15)
64	60	40	140,6	(37)
45	40	60	140,6	(37)
62	75	25	114,0	(30)
26	25	75	114,0	(30)
42	67	33	83,6	(22)
24	33	67	83,6	(22)

### 6 Special features

00 - None

(Only required if valve has special features, omitted if "00".)


## Dimensions

mm (inch)


Torque cartridge in aluminum housing to 108–122 Nm (80–90 ft lbs)

### Cartridge only

Basic code  
FDC11-16

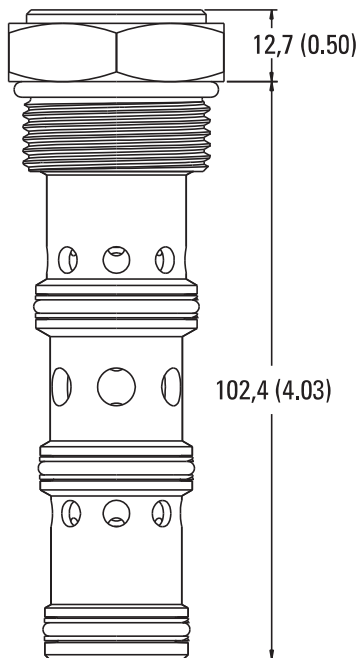

## Installation drawing

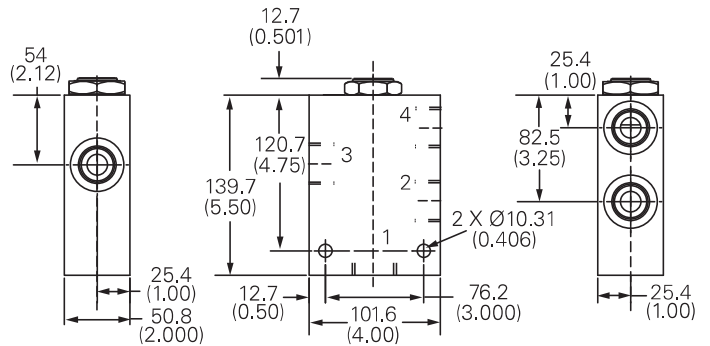

**Notes:** Port 1, unused, blocked by blind cavity.

Minimum inlet flow should not be less than 1/4 of maximum inlet flow for a given code.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.